




Fill Evaluation System for Cooling Tower Film Fill

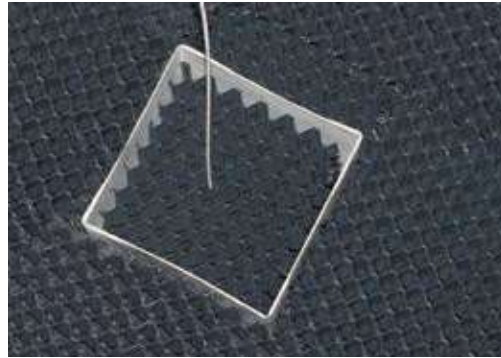

The Star Cooling Towers Fill Evaluation System for cooling towers is a simple, direct way to monitor your cooling tower's film fill for fouling.

The system utilizes an FRP fill weigh box. A portion of the film fill is field cut around the box, then field trimmed to fit inside the box. This block of fill is attached via a stainless steel rod and assorted stainless steel hardware to a retainer assembly on the fan deck. The block of fill can then be lifted and weighed periodically from the fan deck without having to enter the cooling tower.

OEM Replacement Parts

Star Cooling Towers is a complete cooling tower supply company, offering a wide range of products to the cooling tower industry since 1951. Our large selection of quality OEM (Original Equipment Manufacturer) replacement parts are compatible with most models and manufacturers of cooling towers and they offer a high quality, reliable, low-cost alternative to expensive original equipment parts.

Call today for more details on the Star Cooling Towers Fill Evaluation System.



9007 FM 2759 Richmond, Texas
77469

Toll Free: 800-231-0534

Ph.: 713-645-3323

www.starcoolingtowers.com

