


**STRONGWELL®**

# FIBERGLASS GRATING

**DURADEK® and DURAGRID® PULTRUDED GRATING**

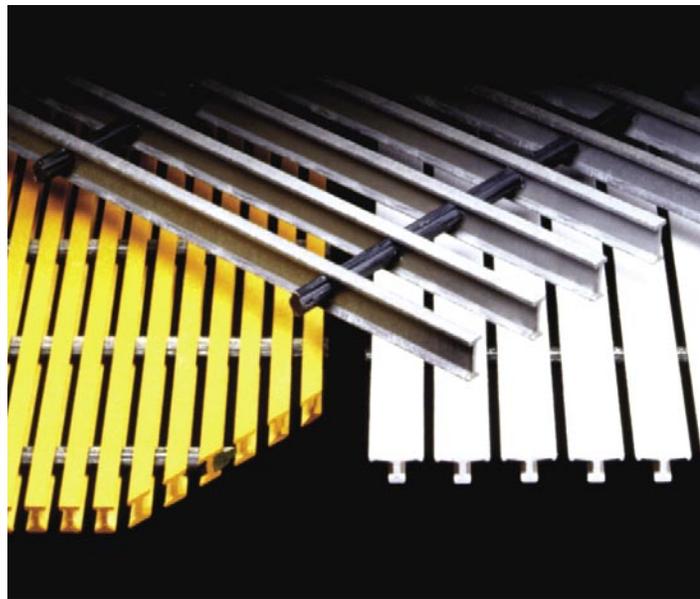

# High Strength Pultruded Fiberglass Grating



**Top:** *DURADEK® and DURAGRID® fiberglass grating provide safe, corrosion resistant walkways and work platforms in a broad range of markets and industries.*

**Left:** *Manufactured with unique cross bar construction, DURADEK® and DURAGRID® fiberglass grating can be cut to any size like a solid sheet.*

## What is DURADEK® and DURAGRID®?

**DURADEK®** and **DURAGRID®** are high strength pultruded bar type gratings that can be designed and used like traditional metal grates but have the inherent benefits of fiberglass. These problem solving products are ideal replacements for steel or aluminum gratings in corrosive environments or anywhere frequent grating and walkway replacement costs are unacceptable.

**DURADEK®** is a standard product stocked by distributors nationwide. It is available with individual bearing bars in either 1" or 1-1/2" I-shapes or a 2" T-shape. **DURADEK®** is a flame retardant product utilizing a polyester or vinyl ester resin. The bearing bars are assembled into 12 panel sizes: 3-, 4-, and 5- foot widths in each of 8-, 10-, 12- and 20-foot lengths. Standard panels come with cross-rod spacings of 6" or optional 12" on center.


**DURAGRID®** custom grid or grating systems are designed to accommodate specific applications that cannot effectively be met by a standard fiberglass grating. **DURAGRID®** offers the customer options such as selection of open space, bar shape, cross-rod placement, custom fabrication, custom resin or color.

## Why Use DURADEK® or DURAGRID® Grating?

**DURADEK®** and **DURAGRID®** are lightweight, which saves on freight and makes installation easier. The unique cross-bar construction of **DURADEK®** and **DURAGRID®** allows the grating panels to be easily cut and modified to fit almost any plant requirement. A full listing of features are shown below.

## Features

- Corrosion Resistant
- Structurally Strong
- High Impact and Fatigue Strength
- Lightweight
- Easy to Fabricate and Install
- Low Maintenance
- Low Conductivity
- Resistant to Chipping and Cracking
- Aesthetically Pleasing Appearance
- Skid Resistant
- Rigid
- Low Thermal Conductivity
- Non-Sparking

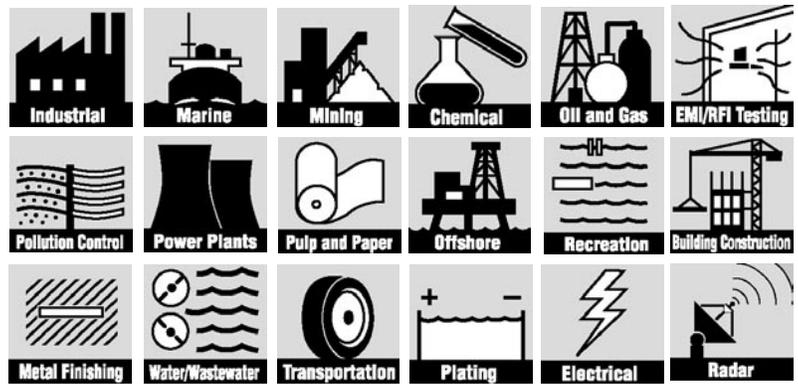

# Materials of Construction


DURADEK® and DURAGRID® fiberglass gratings are a composite of fiberglass reinforcements (fibers and mat) and a thermosetting resin system, produced by the pultrusion process. The pultrusion manufacturing process produces many of the outstanding characteristics of the product.



The bearing bars use both longitudinal (glass roving) and multidirectional (glass mat) reinforcements as well as a synthetic surfacing veil to provide unequalled strength and corrosion resistance. The densely packed core of continuous glass rovings gives the bar strength and stiffness in the longitudinal direction while the continuous glass mat provides strength in the transverse direction and prevents chipping, cracking and lineal fracturing. The synthetic surfacing veil provides a 100% pure resin surface for added corrosion resistance and UV protection.

## Three-Piece Cross-Rod Assembly

The 3-piece cross-rod assembly used in DURADEK® and DURAGRID® grating forms a strong, unified panel that can be cut and fabricated like a solid sheet.

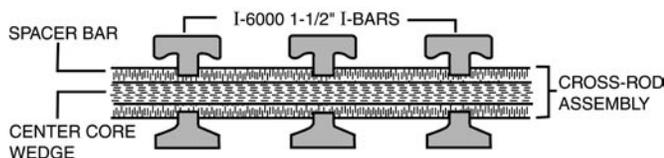

This unique system consists of two continuous, pultruded spacer bars and a center core wedge. The spacers are notched at each bearing bar so that the bars are both mechanically locked and chemically bonded to the web of each bearing bar. This separates and affixes bearing bars firmly in position and distributes concentrated loads to adjacent bars. The resulting panel can be easily fabricated with standard carpenters' tools with abrasive cutting edges. Ask for the detailed *Grating Field Fabrication Guide* for further details.

## Bar Profiles and Grating Series

A wide variety of bearing bar shapes along with various bearing bar and cross-rod spacings are available depending on the design requirements. Refer to the load/deflection tables in this catalog for selection.

The traditional "I" bar shape provides maximum flexibility in design. It is available in 1", 1-1/4", and 1-1/2" depths.

The "T" bar shape provides a more solid walking surface and prevents catching high heels and other objects between the bars. It is available in 1", 1-1/2" and 2" depths. The Economy series offers a lighter weight bearing bar.

Strongwell's DURAGRID® Heavy Duty (HD) solid bar grating has been designed to take heavy wheel traffic such as forklifts, tow motors and truck traffic. Because of the variety of wheel types and loading, please contact Strongwell's engineering department to determine the series of heavy duty grating to use. It is available in 1", 1-1/4", 1-1/2", 1-3/4", 2", 2-1/4" and 2-1/2" depths.

## Panel Sizes and Shape

Panels can be made to exact sizes to eliminate waste and fabrication costs in the field. The maximum panel weight is 500 lbs. and the maximum panel size is 60" x 240".

## UV Coatings

Bearing bars can be UV coated for added protection and color stability for outdoor applications.

## Color

The two standard colors are gray and yellow. Other colors can be quoted upon request. A small inventory is also maintained of 1" "I" and "T" bars in white non-fire retardant polyester resin.

## Resin Selection

The standard polyester resin used in DURADEK® is fire retardant and meets the requirements for a Class 1 flame rating of 25 or less per ASTM E-84 and meets the self-extinguishing requirements of ASTM D-635. The resin also contains a UV inhibitor.

DURAGRID® offers a wide selection of resin options including polyester, vinyl ester, phenolic, modar, etc. Other choices include fire retardant, UV inhibitors, colors and specialized additives.

## Surface Texture

Grids can be ordered with or without an anti-skid grit surface. A variety of grit material and textures can be ordered.

# Applications

DURADEK® and DURAGRID® grating systems are designed to accommodate a wide variety of applications, such as:


- General Industry
- Marine/Offshore
- Mining/Processing
- Plating Operations
- Transportation
- Chemical Plants
- Electrical
- Power Plants
- Consumer/Recreation
- Cellular Communications
- Food and Beverage Operations
- Water/Wastewater Treatment
- Agricultural
- Pulp and Paper Plants
- Railroad - AAR Approval
- Fire Equipment




Eight-thousand square feet of DURAGRID® I-4000 1" pultruded grating replaced steel grating sidewalks on this bridge in West Virginia.



Manhole covers on Boston's historic Longfellow Bridge use DURAGRID® T-5800 grating bonded to SAFPLATE® gritted plate for a strong solid walking surface.

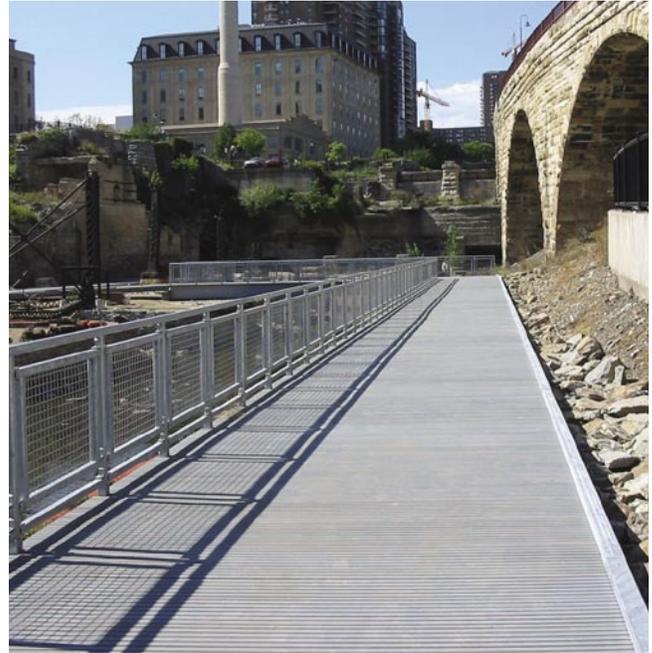

Mill Ruins Park in downtown Minneapolis, Minnesota utilized DURAGRID® T-1800 1" for new pedestrian walkways in the beautiful historical district.

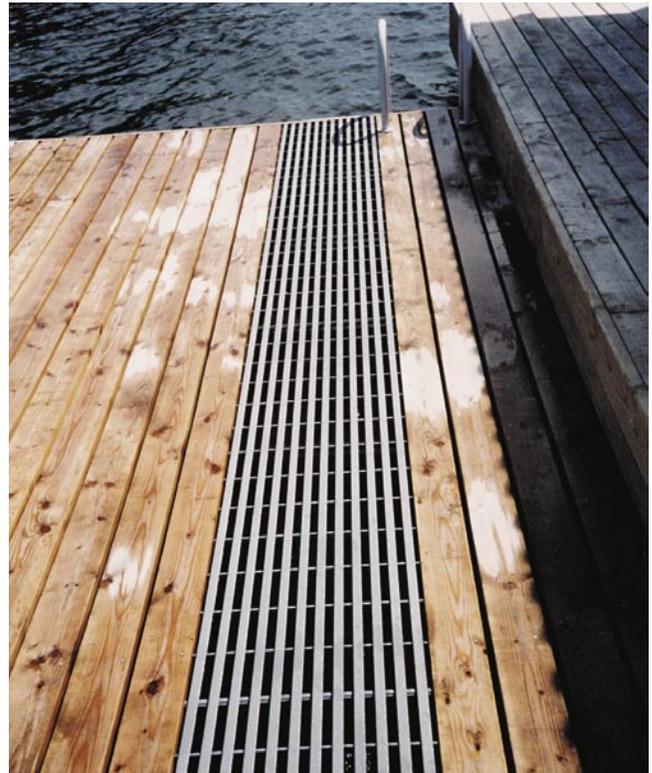


DURAGRID® Economy 5000 provides a strong economical grating for docks while providing the 50% light penetration required to allow for vegetation growth in shallow water.

# Applications



Chicago Transit maintenance walkways alongside elevated train tracks constitute one of the largest fiberglass grating installations in history. This project used DURAGRID® T-5000 2" with a custom polyester resin.

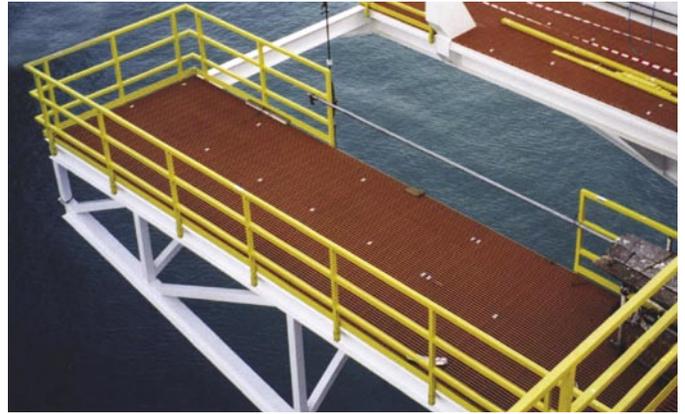

DURAGRID® Phenolic grating is used for fire integrity, weight savings and low maintenance and is U.S. Coast Guard approved. Compared to standard steel grating, DURAGRID® Phenolic I-6000 1-1/2" can carry 1.75 times the load of equivalent steel grating. Unlike metal gratings, DURAGRID® Phenolic has memory—returning to its original shape if design loads are exceeded.



Strongwell's DURAGRID® T-1700 pultruded grating was used to replace wood planks on a large walkway at Dinner Key Marina in Miami, Florida. The grating allows for easy accessibility to utilities below the walkway and will not rot like the previous wooden walkway.



Low maintenance fiberglass grating provides trouble free operations for the covers and walkways in the Lakewood, Colorado Wastewater Treatment Plant Headworks. DURADEK® I-6000 1-1/2" was used.




Copper processing facilities such as the Ammonia Leach/Solvent Extraction/Electrowinning plant for Minera Escondida Limitada in Chile found DURADEK® I-6000 1-1/2" to be the perfect solution.

# Accessories


## Nosings for Stair Treads and Landings

Stair treads and landings are produced by attaching a 2" deep nosing to the leading edge. This gives added strength and rigidity to the area that takes the most impact and abuse. In addition, the nosing provides more surface area for skid resistance, wear and better visibility. Gray stair treads with yellow nosing are available at additional cost.

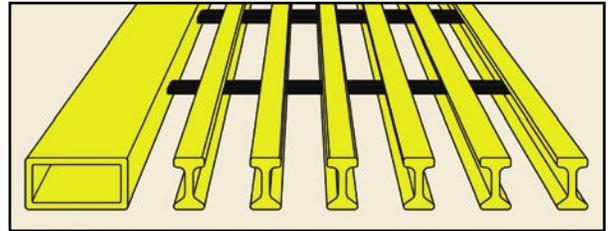


TREAD WIDTH & COLOR	STAIR TREAD SERIES	MAXIMUM SPAN FOR 300 LBS. AT MIDSPAN	
		1/8" OR LESS DEFLECTION	1/4" OR LESS DEFLECTION
11" Gray or Yellow	I-6000 1"	29"	37"
11" Gray or Yellow	I-6000 1-1/2"	40"	52"
12" Gray or Yellow	T-5000 2"	47"	59"

## Panel Hold Downs

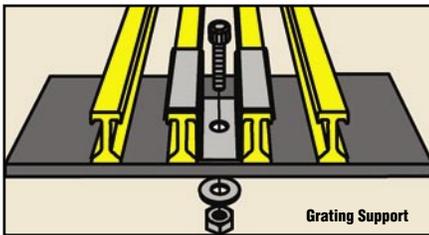


Weldable 316L stainless steel saddle clips are available for all grating series except T-1800 and T-3500.

*\*Bolts are priced separately from the saddle clips.*

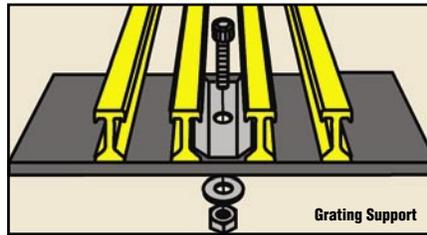

Weldable 316L stainless steel insert clips are available for all grating series except T-1800 and T-3500.

*\*Bolts are priced separately from the hold-down.*

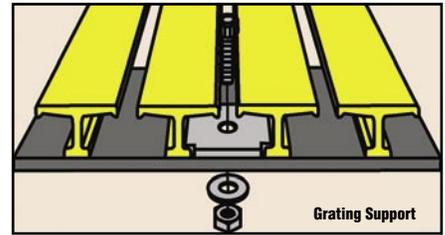


Weldable 316L stainless steel insert clips are available for series T-1800 and T-3500 only.


*\*Bolts are priced separately from the hold-down.  
(All bolts are 1/4-20 x 1-1/4", cap head, 316L stainless steel.)*

## Panel Connectors


Panel Connectors are generally only used at midspan to assist in transferring load from section to section.

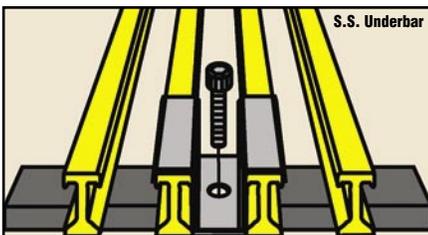

316L stainless steel saddle clips are available as panel connectors for "I" and "HD" bar grating and T-bar grating except T-1800 and T-3500.

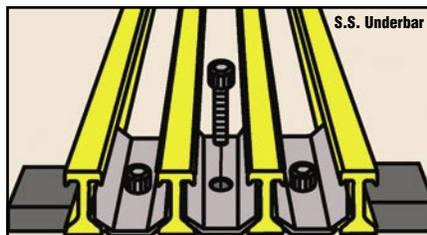

Insert clip hold-downs are available for I-bar grating and T-bar grating except for T-1800 and T-3500.

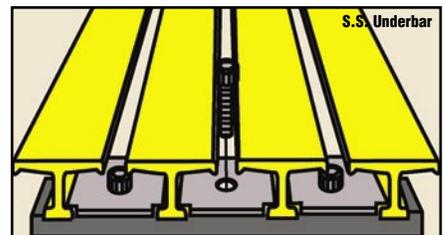


Insert clip hold-downs are available for T-1800 and T-3500 grating.

*(All bolts are 1/4-20 x 1-1/4", cap head, 316L stainless steel.)*

## Curb Angle

Fiberglass Curb Angle provides a strong, firm base for bearing bars and is pultruded from the same material and in the same manner as other DURADEK® and DURAGRID® products. Corrosion resistant Fiberglass Curb Angles are available in four sizes in gray fire retardant vinyl ester.

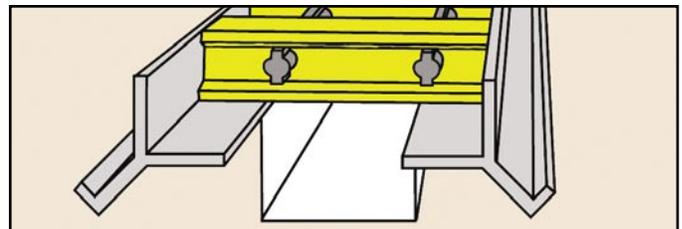

# Using The Load/Deflection Tables

## Typical Bearing Bar Spacings

Strongwell manufactures virtually any non-standard and non-stocked custom grid and grating. However, the following load tables are for the most popular bearing bar configurations. The physical properties are shown for the section.

To determine loading or physical properties for other bar spacings, use the multiplier shown on the tables.

## Series Designation

The series designation indicates the bar size and shape and the percent of open area. For example: T-1800 1" means 1" T-bar spaced to give an 18% open area.

## Cross Rod Spacings

Cross rod spacings must be 2", 4", 6", 8", 10", etc. Our standard spacings are 6", 12" and 18" on center.


## Load Table Values

All tables show typical values.

## Load Data

Deflection and safe load data were calculated by the Strongwell Test Lab. All tables show typical values.

- c** is Concentrated Load LBS/FT of width
- Δc** is Deflection under Concentrated Load
- u** is Uniform Load LBS/FT<sup>2</sup>
- Δu** is Deflection under Uniform Load

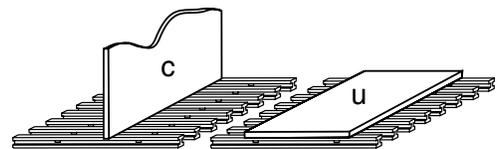

The modulus of elasticity will vary with span length due to the non-homogeneous make-up of composite material.


## DURADEK® High Strength Fiberglass Grating

The following load tables are for standard DURADEK® fiberglass grating panels stocked by distributors: DURADEK® I-6000 1", I-6000 1-1/2", and T-5000 2". Standard panels come with cross-rod spacings of 6" or optional 12" on center.

### DURADEK® I-6000 1" Bearing Bars Spaced 1-1/2" On Center

A = 2.496 IN<sup>2</sup>/FT OF WIDTH    S = 0.656 IN<sup>3</sup>/FT OF WIDTH    I = 0.328 IN<sup>4</sup>/FT OF WIDTH  
60% OPEN AREA    APPROX. WT. = 2.4 LBS/SQ FT

SPAN INCHES		LOAD													SAFE LOAD 2:1 SAFETY FACTOR	DEFLECTION	E x 10 <sup>6</sup> PSI	
		50	100	150	200	250	300	400	500	750	1000	2000	3000	4000				5000
12	Δu	0.001	0.002	0.003	0.004	0.005	0.005	0.007	0.009	0.014	0.018	0.036	0.054	0.073	0.091	10401	0.189	3.78
	Δc	0.001	0.003	0.004	0.006	0.007	0.009	0.012	0.015	0.022	0.029	0.058	0.087	0.116	0.145			
18	Δu	0.004	0.008	0.013	0.017	0.021	0.025	0.033	0.042	0.063	0.084	0.167	0.251	0.335	0.418	4954	0.415	4.15
	Δc	0.004	0.009	0.013	0.018	0.022	0.027	0.036	0.045	0.067	0.089	0.179	0.268	0.357	0.446			
24	Δu	0.012	0.025	0.037	0.050	0.062	0.075	0.100	0.124	0.187	0.249	0.498				2900	0.722	4.41
	Δc	0.010	0.020	0.030	0.040	0.050	0.060	0.080	0.100	0.149	0.199	0.398	0.597					
30	Δu	0.029	0.058	0.087	0.116	0.145	0.174	0.231	0.289	0.434	0.579					1856	1.074	4.63
	Δc	0.019	0.037	0.056	0.074	0.093	0.111	0.148	0.185	0.278	0.370				2320			
36	Δu	0.058	0.115	0.173	0.230	0.288	0.345	0.460	0.575						1289	1.483	4.83	
	Δc	0.031	0.061	0.092	0.123	0.153	0.184	0.245	0.307	0.460	0.614							1933
42	Δu	0.105	0.211	0.316	0.422	0.527	0.633								943	1.989	4.88	
	Δc	0.048	0.096	0.145	0.193	0.241	0.289	0.386	0.482									1649
48	Δu	0.176	0.353	0.529	0.705										719	2.534	4.98	
	Δc	0.071	0.141	0.212	0.282	0.353	0.423	0.564										1437
54	Δu	0.281	0.563												566	3.184	5.00	
	Δc	0.100	0.200	0.300	0.400	0.500	0.600											1274

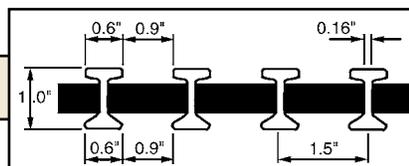


**NOTE:** When a 100 pounds per square foot uniform load is placed upon a 43" simple span, it will produce a deflection of 1/4" at midspan.

## DURADEK® I-6000 1-1/2" Bearing Bars Spaced 1-1/2" On Center

A = 3.136 IN<sup>2</sup>/FT OF WIDTH    S = 1.240 IN<sup>3</sup>/FT OF WIDTH    I = 0.928 IN<sup>4</sup>/FT OF WIDTH  
60% OPEN AREA    APPROX. WT. = 3.0 LBS/SQ FT

SPAN INCHES		LOAD															SAFE LOAD 2:1 SAFETY FACTOR	DEFLECTION	E x 10 <sup>6</sup> PSI	
		50	100	150	200	250	300	400	500	750	1000	2000	3000	4000	5000	6000				7000
12	Δu	0.000	0.001	0.001	0.001	0.002	0.002	0.003	0.003	0.005	0.006	0.013	0.019	0.026	0.032	0.038	0.045	17601 8800	0.113 0.090	3.79
	Δc	0.001	0.001	0.002	0.002	0.003	0.003	0.004	0.005	0.008	0.010	0.010	0.020	0.031	0.041	0.051	0.061			
18	Δu	0.002	0.003	0.005	0.006	0.008	0.009	0.012	0.015	0.023	0.030	0.061	0.091	0.121	0.152	0.182	0.212	7823 5867	0.237 0.190	4.05
	Δc	0.002	0.003	0.005	0.006	0.008	0.010	0.013	0.016	0.024	0.032	0.065	0.097	0.129	0.162	0.194	0.226			
24	Δu	0.005	0.009	0.014	0.018	0.023	0.027	0.037	0.046	0.069	0.091	0.183	0.274	0.366	0.457	0.549	0.640	4400 4400	0.403 0.322	4.24
	Δc	0.004	0.007	0.011	0.015	0.018	0.022	0.029	0.037	0.055	0.073	0.146	0.220	0.293	0.366	0.439	0.512			
30	Δu	0.011	0.022	0.032	0.043	0.054	0.065	0.086	0.108	0.161	0.215	0.430	0.646	2773 3467	0.597 0.478	4.40				
	Δc	0.007	0.014	0.021	0.028	0.034	0.041	0.055	0.069	0.103	0.138	0.276	0.413				0.551			
36	Δu	0.022	0.044	0.065	0.087	0.109	0.131	0.175	0.218	0.327	0.436	1896 2845	0.827 0.662	4.50						
	Δc	0.012	0.023	0.035	0.047	0.058	0.070	0.093	0.116	0.175	0.233				0.466					
42	Δu	0.040	0.079	0.119	0.159	0.198	0.238	0.317	0.396	0.595	1361 2381	1.079 0.863	4.59							
	Δc	0.018	0.036	0.054	0.072	0.091	0.109	0.145	0.181	0.272				0.362						
48	Δu	0.067	0.133	0.200	0.266	0.333	0.400	0.533	0.666	1017 2033	1.354 1.083	4.66								
	Δc	0.027	0.053	0.080	0.107	0.133	0.160	0.213	0.266				0.400	0.533						
54	Δu	0.106	0.211	0.317	0.422	0.528	0.633	777 1748	1.640 1.312	4.71										
	Δc	0.038	0.075	0.113	0.150	0.188	0.225				0.300	0.375	0.563							
60	Δu	0.160	0.320	0.480	0.639	608 1520	1.944 1.555	4.74												
	Δc	0.051	0.102	0.153	0.205				0.256	0.307	0.409	0.512								
66	Δu	0.233	0.466	485 1333	2.259 1.808	4.76														
	Δc	0.068	0.136				0.203	0.271	0.339	0.407	0.542	0.678								

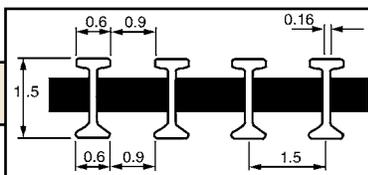


**NOTE:** When a 100 pounds per square foot uniform load is placed upon a 56" simple span, it will produce a deflection of 1/4" at midspan.

## DURADEK® T-5000 2" Bearing Bars Spaced 2" On Center

A = 3.252 IN<sup>2</sup>/FT OF WIDTH    S<sub>1</sub> = 1.906 IN<sup>3</sup>/FT OF WIDTH    S<sub>2</sub> = 1.495 IN<sup>3</sup>/FT OF WIDTH    I = 1.676 IN<sup>4</sup>/FT OF WIDTH  
50% OPEN AREA    APPROX. WT. = 3.1 LBS/SQ FT

SPAN INCHES		LOAD																SAFE LOAD 2:1 SAFETY FACTOR	DEFLECTION	E x 10 <sup>6</sup> PSI	
		50	100	150	200	250	300	400	500	750	1000	2000	3000	4000	5000	6000	7000				8000
12	Δu	0.000	0.000	0.001	0.001	0.001	0.001	0.001	0.002	0.003	0.004	0.007	0.011	0.014	0.018	0.021	0.025	0.028	11333 5666	0.040 0.032	3.80
	Δc	0.000	0.001	0.001	0.001	0.001	0.002	0.002	0.003	0.004	0.006	0.011	0.017	0.023	0.028	0.034	0.040	0.045			
18	Δu	0.001	0.002	0.003	0.003	0.004	0.005	0.007	0.009	0.013	0.017	0.035	0.052	0.070	0.087	0.104	0.122	0.139	7536 5666	0.131 0.105	3.91
	Δc	0.001	0.002	0.003	0.004	0.005	0.006	0.007	0.009	0.014	0.019	0.037	0.056	0.074	0.093	0.111	0.130	0.148			
24	Δu	0.003	0.005	0.008	0.011	0.013	0.016	0.021	0.027	0.040	0.054	0.107	0.161	0.214	0.268	0.321	0.375	0.429	5666 5666	0.304 0.243	4.01
	Δc	0.002	0.004	0.006	0.009	0.011	0.013	0.017	0.021	0.032	0.043	0.086	0.129	0.171	0.214	0.257	0.300	0.343			
30	Δu	0.006	0.013	0.019	0.026	0.032	0.038	0.051	0.064	0.096	0.128	0.256	0.384	0.512	0.640	3626 4534	0.464 0.371	4.10			
	Δc	0.004	0.008	0.012	0.016	0.020	0.025	0.033	0.041	0.061	0.082	0.164	0.246	0.327	0.409				0.491	0.573	0.655
36	Δu	0.013	0.026	0.039	0.052	0.065	0.078	0.104	0.130	0.195	0.260	0.520	2519 3778	0.655 0.524	4.18						
	Δc	0.007	0.014	0.021	0.028	0.035	0.042	0.055	0.069	0.104	0.139	0.277				0.416	0.555	0.694			
42	Δu	0.024	0.047	0.071	0.095	0.119	0.142	0.190	0.237	0.356	0.474	1850 3238	0.877 0.702	4.25							
	Δc	0.011	0.022	0.033	0.043	0.054	0.065	0.087	0.108	0.163	0.217				0.433	0.650					
48	Δu	0.040	0.079	0.119	0.158	0.198	0.238	0.317	0.396	0.594	1417 2834	1.122 0.898	4.34								
	Δc	0.016	0.032	0.048	0.063	0.079	0.095	0.127	0.158	0.238				0.317	0.634						
54	Δu	0.062	0.125	0.187	0.250	0.312	0.374	0.499	0.624	1120 2519	1.398 1.118	4.41									
	Δc	0.022	0.044	0.067	0.089	0.111	0.133	0.178	0.222				0.333	0.444							
60	Δu	0.094	0.188	0.282	0.375	0.469	0.563	0.751	907 2267	1.702 1.361	4.47										
	Δc	0.030	0.060	0.090	0.120	0.150	0.180	0.240				0.300	0.450	0.601							
66	Δu	0.136	0.272	0.408	0.544	0.679	749 2060	2.036 1.629	4.52												
	Δc	0.040	0.079	0.119	0.158	0.198				0.237	0.316	0.395	0.593								
72	Δu	0.190	0.380	0.570	629 1889	2.390 1.914	4.58														
	Δc	0.051	0.101	0.152				0.203	0.253	0.304	0.405	0.507									
78	Δu	0.260	0.520	536 1744	2.788 2.231	4.61															
	Δc	0.064	0.128				0.192	0.256	0.320	0.384	0.512	0.640									
84	Δu	0.347	0.693	463 1619	3.208 2.566	4.65															
	Δc	0.079	0.158				0.238	0.317	0.396	0.475	0.634										

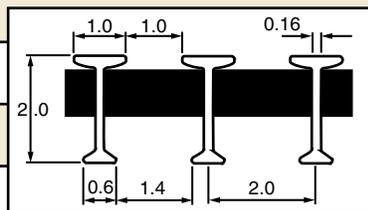

**NOTE:** When a 100 pounds per square foot uniform load is placed upon a 64" simple span, it will produce a deflection of 1/4" at midspan.

### DURAGRID® I-4000 1" I Bearing Bars Spaced 1" On Center


OTHER COMMON SERIES AND SPACING (X):

SERIES	(X)	(M)*
I-3000	0.850"	1.17
I-5000	1.200"	0.84
I-7000	2.000"	0.50
I-8000	3.000"	0.33

OR MULTIPLES OF ABOVE

1" I BEARING BARS: VALUES PER FT OF WIDTH  
 A = 3.744 IN<sup>2</sup>/FT OF WIDTH    S = 0.984 IN<sup>3</sup>/FT OF WIDTH    I = 0.492 IN<sup>4</sup>/FT OF WIDTH  
 WEIGHT/FOOT = .253 LBS/FT OF BAR    WEIGHT/FOOT = .186 LBS/FT OF CROSS ROD  
 APPROX. WEIGHT = 3.4 LBS/SQ. FT.

SPAN INCHES		LOAD														SAFE LOAD 2:1 SAFETY FACTOR	DEFLECTION	E x 10 <sup>6</sup> PSI		
		50	100	150	200	250	300	400	500	750	1000	2000	2500	3000	4000				5000	6000
12	Δu	0.001	0.001	0.002	0.002	0.003	0.004	0.005	0.006	0.009	0.012	0.024	0.030	0.036	0.048	0.060	0.073	15600 7800	0.189 0.151	3.78
	Δc	0.001	0.002	0.003	0.004	0.005	0.006	0.008	0.010	0.015	0.019	0.039	0.048	0.058	0.077	0.097	0.116			
18	Δu	0.003	0.006	0.008	0.011	0.014	0.017	0.022	0.028	0.042	0.056	0.112	0.139	0.167	0.223	0.279	0.335	7431 5573	0.415 0.332	4.15
	Δc	0.003	0.006	0.009	0.012	0.015	0.018	0.024	0.030	0.045	0.060	0.119	0.149	0.179	0.238	0.298	0.357			
24	Δu	0.008	0.017	0.025	0.033	0.041	0.050	0.066	0.083	0.124	0.166	0.332	0.415	0.498	0.664			4350 4350	0.722 0.577	4.41
	Δc	0.007	0.013	0.020	0.027	0.033	0.040	0.053	0.066	0.100	0.133	0.265	0.332	0.398	0.531	0.664				
30	Δu	0.019	0.039	0.058	0.077	0.096	0.116	0.154	0.193	0.289	0.386							2784 3480	1.074 0.859	4.63
	Δc	0.012	0.025	0.037	0.049	0.062	0.074	0.099	0.123	0.185	0.247	0.494	0.617							
36	Δu	0.038	0.077	0.115	0.153	0.192	0.230	0.307	0.383	0.575								1933 2900	1.482 1.186	4.83
	Δc	0.020	0.041	0.061	0.082	0.102	0.123	0.164	0.205	0.307	0.409									
42	Δu	0.070	0.141	0.211	0.281	0.352	0.422	0.563	0.703									1414 2474	1.988 1.590	4.88
	Δc	0.032	0.064	0.096	0.129	0.161	0.193	0.257	0.321	0.482	0.643									
48	Δu	0.118	0.235	0.353	0.470	0.588	0.705											1078 2155	2.534 2.026	4.98
	Δc	0.047	0.094	0.141	0.188	0.235	0.282	0.376	0.470											

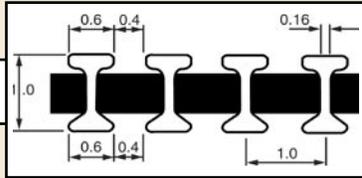

\*(M) - Multiplier for load table loads

### DURAGRID® I-4000 1-1/4" I Bearing Bars Spaced 1" On Center


OTHER COMMON SERIES AND SPACING (X):

SERIES	(X)	(M)*
I-3000	0.850"	1.17
I-5000	1.200"	0.84
I-6000	1.500"	0.67
I-7000	2.000"	0.50

OR MULTIPLES OF ABOVE

1-1/4" I BEARING BARS: VALUES PER FT OF WIDTH  
 A = 4.224 IN<sup>2</sup>/FT OF WIDTH    S = 1.306 IN<sup>3</sup>/FT OF WIDTH    I = 0.816 IN<sup>4</sup>/FT OF WIDTH  
 WEIGHT/FOOT = .290 LBS/FT OF BAR    WEIGHT/FOOT = .186 LBS/FT OF CROSS ROD  
 APPROX. WEIGHT = 3.9 LBS/SQ. FT.

SPAN INCHES		LOAD															SAFE LOAD 2:1 SAFETY FACTOR	DEFLECTION	E x 10 <sup>6</sup> PSI	
		50	100	150	200	250	300	400	500	750	1000	2000	3000	4000	5000	6000				7000
12	Δu	0.000	0.001	0.001	0.002	0.002	0.002	0.003	0.004	0.006	0.008	0.016	0.023	0.031	0.039	0.047	0.054	21000 10500	0.163 0.130	3.55
	Δc	0.001	0.001	0.002	0.002	0.003	0.004	0.005	0.006	0.009	0.012	0.025	0.037	0.050	0.062	0.075	0.087			
18	Δu	0.002	0.004	0.005	0.007	0.009	0.011	0.015	0.018	0.027	0.037	0.073	0.110	0.146	0.183	0.219	0.256	9582 7187	0.350 0.280	3.82
	Δc	0.002	0.004	0.006	0.008	0.010	0.012	0.016	0.019	0.029	0.039	0.078	0.117	0.156	0.195	0.234	0.273			
24	Δu	0.005	0.011	0.016	0.022	0.027	0.033	0.044	0.054	0.082	0.109	0.218	0.327	0.436	0.545	0.654		5475 5475	0.596 0.477	4.05
	Δc	0.004	0.009	0.013	0.017	0.022	0.026	0.035	0.044	0.065	0.087	0.174	0.261	0.349	0.436	0.523	0.610			
30	Δu	0.013	0.026	0.038	0.051	0.064	0.077	0.102	0.128	0.192	0.256	0.512						3472 4340	0.888 0.711	4.21
	Δc	0.008	0.016	0.025	0.033	0.041	0.049	0.065	0.082	0.123	0.164	0.327	0.491	0.655						
36	Δu	0.026	0.051	0.077	0.103	0.128	0.154	0.205	0.257	0.385	0.513							2388 3583	1.226 0.981	4.35
	Δc	0.014	0.027	0.041	0.055	0.068	0.082	0.110	0.137	0.205	0.274	0.548								
42	Δu	0.046	0.093	0.139	0.186	0.232	0.279	0.372	0.465	0.697								1727 3023	1.606 1.285	4.45
	Δc	0.021	0.043	0.064	0.085	0.106	0.128	0.170	0.213	0.319	0.425									
48	Δu	0.078	0.155	0.233	0.310	0.388	0.465	0.621										1302 2603	2.020 1.615	4.55
	Δc	0.031	0.062	0.093	0.124	0.155	0.186	0.248	0.310	0.465	0.621									
54	Δu	0.123	0.245	0.368	0.491	0.613	0.736											1007 2267	2.470 1.977	4.61
	Δc	0.044	0.087	0.131	0.174	0.218	0.262	0.349	0.436	0.654										
60	Δu	0.185	0.370	0.555	0.740													796 1990	2.944 2.355	4.66
	Δc	0.059	0.118	0.178	0.237	0.296	0.355	0.473	0.592											

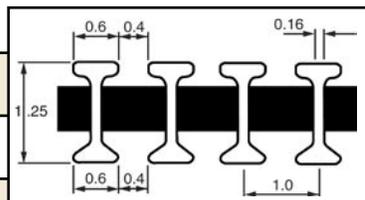

\*(M) - Multiplier for load table loads

## DURAGRID® I-4000 1-1/2" I Bearing Bars Spaced 1" On Center


OTHER COMMON SERIES AND SPACING (X):

SERIES	(X)	(M)*
I-3000	0.850"	1.17
I-5000	1.200"	0.84
I-7000	2.000"	0.50
I-8000	3.000"	0.33

OR MULTIPLES OF ABOVE

1-1/2" I BEARING BARS: VALUES PER FT OF WIDTH  
 A = 4.704 IN<sup>2</sup>/FT OF WIDTH      S = 1.860 IN<sup>3</sup>/FT OF WIDTH      I = 1.392 IN<sup>4</sup>/FT OF WIDTH  
 WEIGHT/FOOT = .319 LBS/FT OF BAR      WEIGHT/FOOT = .186 LBS/FT OF CROSS ROD  
 APPROX. WEIGHT = 4.2 LBS/SQ. FT.

SPAN INCHES		LOAD																	SAFE LOAD 2:1 SAFETY FACTOR	DEFLECTION	E x 10 <sup>6</sup> PSI	
		50	100	150	200	250	300	400	500	750	1000	2000	3000	4000	5000	6000	7000	8000				9000
12	Δu	0.000	0.000	0.001	0.001	0.001	0.001	0.002	0.002	0.003	0.004	0.009	0.013	0.017	0.021	0.026	0.030	0.034	0.038	26400	0.113	3.79
	Δc	0.000	0.001	0.001	0.001	0.002	0.002	0.003	0.003	0.005	0.007	0.014	0.020	0.027	0.034	0.041	0.048	0.055	0.061			
18	Δu	0.001	0.002	0.003	0.004	0.005	0.006	0.008	0.010	0.015	0.020	0.040	0.061	0.081	0.101	0.121	0.141	0.162	0.182	11734	0.237	4.05
	Δc	0.001	0.002	0.003	0.004	0.005	0.006	0.009	0.011	0.016	0.022	0.043	0.065	0.086	0.108	0.129	0.151	0.172	0.194			
24	Δu	0.003	0.006	0.009	0.012	0.015	0.018	0.024	0.030	0.046	0.061	0.122	0.183	0.244	0.305	0.366	0.427	0.488	0.549	6600	0.403	4.24
	Δc	0.002	0.005	0.007	0.010	0.012	0.015	0.020	0.024	0.037	0.049	0.098	0.146	0.195	0.244	0.293	0.342	0.390	0.439			
30	Δu	0.007	0.014	0.022	0.029	0.036	0.043	0.057	0.072	0.108	0.143	0.287	0.430	0.574	0.717					4160	0.597	4.40
	Δc	0.005	0.009	0.014	0.018	0.023	0.028	0.037	0.046	0.069	0.092	0.184	0.276	0.367	0.459	0.551	0.643					
36	Δu	0.015	0.029	0.044	0.058	0.073	0.087	0.116	0.145	0.218	0.291	0.582								2844	0.827	4.50
	Δc	0.008	0.016	0.023	0.031	0.039	0.047	0.062	0.078	0.116	0.155	0.310	0.466	0.621								
42	Δu	0.026	0.053	0.079	0.106	0.132	0.159	0.211	0.264	0.396	0.528									2041	1.079	4.59
	Δc	0.012	0.024	0.036	0.048	0.060	0.072	0.097	0.121	0.181	0.242	0.483	0.725									
48	Δu	0.044	0.089	0.133	0.178	0.222	0.266	0.355	0.444	0.666										1525	1.354	4.66
	Δc	0.018	0.036	0.053	0.071	0.089	0.107	0.142	0.178	0.266	0.355											
54	Δu	0.070	0.141	0.211	0.281	0.352	0.422	0.563	0.704											1165	1.639	4.71
	Δc	0.025	0.050	0.075	0.100	0.125	0.150	0.200	0.250	0.375	0.500											
60	Δu	0.107	0.213	0.320	0.426	0.533	0.639													912	1.944	4.74
	Δc	0.034	0.068	0.102	0.136	0.171	0.205	0.273	0.341	0.512	0.682											
66	Δu	0.155	0.311	0.466	0.621															727	2.259	4.76
	Δc	0.045	0.090	0.136	0.181	0.226	0.271	0.362	0.452	0.678												

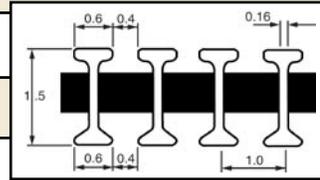

\*(M) - Multiplier for load table loads

## DURAGRID® T-1800 1" T Bearing Bars Spaced 2" On Center

OTHER COMMON SERIES AND SPACING (X):


SERIES	(X)	(M)*
T-0000	1.625"	1.23
T-1000	1.800"	1.11
T-1200	1.850"	1.08
T-2500	2.120"	0.94
T-3500	2.400"	0.83
T-3800	2.620"	0.76

OR MULTIPLES OF ABOVE

1" T BEARING BARS: VALUES PER FT OF WIDTH  
 A = 2.850 IN<sup>2</sup>/FT OF WIDTH      S<sub>y</sub> = 0.903 IN<sup>3</sup>/FT OF WIDTH  
 I = 0.306 IN<sup>4</sup>/FT OF WIDTH      S<sub>b</sub> = 0.464 IN<sup>3</sup>/FT OF WIDTH  
 WEIGHT/FOOT = .373 LBS/FT OF BAR      WEIGHT/FOOT = .186 LBS/FT OF CROSS ROD  
 APPROX. WEIGHT = 2.6 LBS/SQ. FT.

Now available 1.5" T bar. Call for details.

SPAN INCHES		LOAD														SAFE LOAD 2:1 SAFETY FACTOR	DEFLECTION	E x 10 <sup>6</sup> PSI
		50	100	150	200	250	300	400	500	750	1000	2000	2500	3000	4000			
12	Δu	0.001	0.002	0.003	0.004	0.006	0.007	0.009	0.011	0.017	0.022	0.045	0.056	0.067	0.090	10680	0.240	3.27
	Δc	0.002	0.004	0.005	0.007	0.009	0.011	0.014	0.018	0.027	0.036	0.072	0.090	0.108	0.144			
18	Δu	0.005	0.010	0.016	0.021	0.026	0.031	0.041	0.052	0.078	0.104	0.207	0.259	0.311	0.415	4746	0.492	3.59
	Δc	0.006	0.011	0.017	0.022	0.028	0.033	0.044	0.055	0.083	0.111	0.221	0.277	0.332	0.442			
24	Δu	0.015	0.031	0.046	0.062	0.077	0.093	0.124	0.155	0.232	0.310	0.619				2670	0.827	3.80
	Δc	0.012	0.025	0.037	0.050	0.062	0.074	0.099	0.124	0.186	0.248	0.495	0.619					
30	Δu	0.036	0.072	0.108	0.144	0.180	0.215	0.287	0.359	0.539	0.718					1693	1.216	4.00
	Δc	0.023	0.046	0.069	0.092	0.115	0.138	0.184	0.230	0.345	0.460							
36	Δu	0.072	0.145	0.217	0.289	0.361	0.434	0.578	0.723							1157	1.673	4.12
	Δc	0.039	0.077	0.116	0.154	0.193	0.231	0.308	0.385	0.578								
42	Δu	0.129	0.257	0.386	0.514	0.643										833	2.143	4.29
	Δc	0.059	0.118	0.176	0.235	0.294	0.353	0.470	0.588									
48	Δu	0.215	0.431	0.646												625	2.692	4.37
	Δc	0.086	0.172	0.258	0.345	0.431	0.517	0.689										

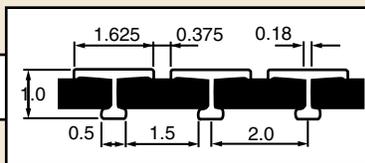

\*(M) - Multiplier for load table loads

## DURAGRID® T-3300 2" T Bearing Bars Spaced 1-1/2" On Center

OTHER COMMON SERIES AND SPACING (X):


SERIES	(X)	(M)*
T-1700	1.200"	1.25
OR MULTIPLES OF ABOVE		

2" T BEARING BARS: VALUES PER FT OF WIDTH

A = 4.338 IN<sup>2</sup>/FT OF WIDTH    S<sub>r</sub> = 2.541 IN<sup>2</sup>/FT OF WIDTH  
 I = 2.234 IN<sup>4</sup>/FT OF WIDTH    S<sub>b</sub> = 1.994 IN<sup>3</sup>/FT OF WIDTH

WEIGHT/FOOT = .446 LBS/FT OF BAR    WEIGHT/FOOT = .186 LBS/FT OF CROSS ROD  
 APPROX. WEIGHT = 3.9 LBS/SQ. FT.

SPAN INCHES	LOAD																	SAFE LOAD 2:1 SAFETY FACTOR	DEFLECTION	E x 10 <sup>6</sup> PSI		
	50	100	150	200	250	300	400	500	750	1000	2000	2500	3000	4000	5000	6000	7000				8000	
<b>12</b>	Δu	0.000	0.000	0.000	0.001	0.001	0.001	0.001	0.001	0.002	0.003	0.005	0.007	0.008	0.011	0.013	0.016	0.019	0.021	15110	0.040	<b>3.80</b>
	Δc	0.000	0.000	0.001	0.001	0.001	0.001	0.002	0.002	0.003	0.004	0.008	0.011	0.013	0.017	0.021	0.025	0.030	0.034	7555	0.032	
<b>18</b>	Δu	0.001	0.001	0.002	0.003	0.003	0.004	0.005	0.007	0.010	0.013	0.026	0.033	0.039	0.052	0.065	0.078	0.091	0.104	10048	0.131	<b>3.91</b>
	Δc	0.001	0.001	0.002	0.003	0.003	0.004	0.006	0.007	0.010	0.014	0.028	0.035	0.042	0.056	0.070	0.083	0.097	0.111	7555	0.105	
<b>24</b>	Δu	0.002	0.004	0.006	0.008	0.010	0.012	0.016	0.020	0.030	0.040	0.080	0.100	0.121	0.161	0.201	0.241	0.281	0.321	7555	0.304	<b>4.01</b>
	Δc	0.002	0.003	0.005	0.006	0.008	0.010	0.013	0.016	0.024	0.032	0.064	0.080	0.096	0.129	0.161	0.193	0.225	0.257	7555	0.243	
<b>30</b>	Δu	0.005	0.010	0.014	0.019	0.024	0.029	0.038	0.048	0.072	0.096	0.192	0.240	0.288	0.384	0.480	0.576	0.672		4835	0.464	<b>4.10</b>
	Δc	0.003	0.006	0.009	0.012	0.015	0.018	0.025	0.031	0.046	0.061	0.123	0.154	0.184	0.246	0.307	0.368	0.430	0.491	6045	0.371	
<b>36</b>	Δu	0.010	0.020	0.029	0.039	0.049	0.059	0.078	0.098	0.146	0.195	0.390	0.488	0.586						3358	0.655	<b>4.18</b>
	Δc	0.005	0.010	0.016	0.021	0.026	0.031	0.042	0.052	0.078	0.104	0.208	0.260	0.312	0.416	0.520	0.625			5037	0.524	
<b>42</b>	Δu	0.018	0.036	0.053	0.071	0.089	0.107	0.142	0.178	0.267	0.356									2467	0.877	<b>4.25</b>
	Δc	0.008	0.016	0.024	0.033	0.041	0.049	0.065	0.081	0.122	0.163	0.325	0.406	0.488	0.650					4317	0.702	
<b>48</b>	Δu	0.030	0.059	0.089	0.119	0.149	0.178	0.238	0.297	0.446	0.594									1889	1.122	<b>4.34</b>
	Δc	0.012	0.024	0.036	0.048	0.059	0.071	0.095	0.119	0.178	0.238	0.475	0.594							3778	0.898	
<b>54</b>	Δu	0.047	0.094	0.140	0.187	0.234	0.281	0.375	0.468											1493	1.398	<b>4.41</b>
	Δc	0.017	0.033	0.050	0.067	0.083	0.100	0.133	0.166	0.250	0.333	0.666								3358	1.118	
<b>60</b>	Δu	0.070	0.141	0.211	0.282	0.352	0.422	0.563												1209	1.703	<b>4.47</b>
	Δc	0.023	0.045	0.068	0.090	0.113	0.135	0.180	0.225	0.338	0.451									3022	1.362	
<b>66</b>	Δu	0.102	0.204	0.306	0.408	0.510	0.612													999	2.037	<b>4.52</b>
	Δc	0.030	0.059	0.089	0.119	0.148	0.178	0.237	0.297	0.445	0.593									2747	1.629	
<b>72</b>	Δu	0.142	0.285	0.427	0.570															839	2.391	<b>4.58</b>
	Δc	0.038	0.076	0.114	0.152	0.190	0.228	0.304	0.380	0.570										2519	1.914	
<b>78</b>	Δu	0.195	0.390	0.585																715	2.788	<b>4.61</b>
	Δc	0.048	0.096	0.144	0.192	0.240	0.288	0.384	0.480											2325	2.232	
<b>84</b>	Δu	0.260	0.520																	617	3.209	<b>4.65</b>
	Δc	0.059	0.119	0.178	0.238	0.297	0.357	0.475	0.594											2159	2.566	

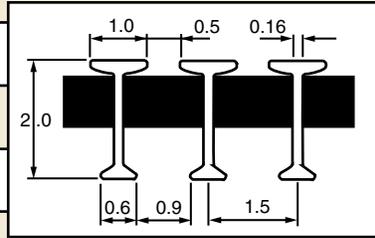

\*(M) - Multiplier for load table loads

## DURAGRID® ECONOMY 5000 1" T Bearing Bars Spaced 2" On Center

OTHER COMMON SERIES AND SPACING (X):


SERIES	(X)	(M)*
ECONOMY 3300	1.500"	1.33
OR MULTIPLES OF ABOVE		

1" T BEARING BAR: VALUES PER FT OF WIDTH

A = 1.596 IN<sup>2</sup>/FT OF WIDTH    S<sub>r</sub> = 0.530 IN<sup>2</sup>/FT OF WIDTH  
 I = 0.197 IN<sup>4</sup>/FT OF WIDTH    S<sub>b</sub> = 0.314 IN<sup>3</sup>/FT OF WIDTH

WEIGHT/FOOT = .207 LBS/FT OF BAR    WEIGHT/FOOT = .186 LBS/FT OF CROSS ROD  
 APPROX. WEIGHT = 1.62 LBS/SQ. FT.

SPAN INCHES	LOAD												SAFE LOAD 2:1 SAFETY FACTOR	DEFLECTION	E x 10 <sup>6</sup> PSI
	50	100	150	200	250	300	400	500	750	1000	2000				
<b>12</b>	Δu	0.002	0.004	0.006	0.008	0.010	0.011	0.015	0.019	0.029	0.038	0.076	4766	0.182	<b>2.99</b>
	Δc	0.003	0.006	0.009	0.012	0.015	0.018	0.024	0.031	0.046	0.061	0.122	2383	0.146	
<b>18</b>	Δu	0.009	0.019	0.028	0.037	0.047	0.056	0.075	0.094	0.140	0.187	0.374	2144	0.401	<b>3.09</b>
	Δc	0.010	0.020	0.030	0.040	0.050	0.060	0.080	0.100	0.150	0.200	0.399	1609	0.321	
<b>24</b>	Δu	0.029	0.057	0.086	0.114	0.143	0.171	0.228	0.286	0.428	0.571		1221	0.697	<b>3.20</b>
	Δc	0.023	0.046	0.069	0.091	0.114	0.137	0.183	0.228	0.343	0.457		1221	0.558	
<b>30</b>	Δu	0.068	0.135	0.203	0.270	0.338	0.406	0.541	0.676				791	1.069	<b>3.30</b>
	Δc	0.043	0.087	0.130	0.173	0.216	0.260	0.346	0.433	0.649			989	0.856	
<b>36</b>	Δu	0.136	0.272	0.408	0.544	0.680							556	1.513	<b>3.40</b>
	Δc	0.073	0.145	0.218	0.290	0.363	0.435	0.580	0.726				834	1.210	
<b>42</b>	Δu	0.244	0.488	0.732									413	2.017	<b>3.51</b>
	Δc	0.112	0.223	0.335	0.446	0.558	0.670						723	1.614	

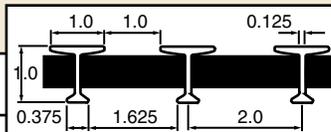

\*(M) - Multiplier for load table loads

# DURAGRID® ECONOMY 5000 1-1/2" T Bearing Bars Spaced 2" On Center

OTHER COMMON SERIES AND SPACING (X):

SERIES	(X)	(M)*
ECONOMY 3300	1.500*	1.33
OR MULTIPLES OF ABOVE		


1-1/2" T BEARING BAR: VALUES PER FT OF WIDTH

A = 1.968 IN<sup>2</sup>/FT OF WIDTH S<sub>y</sub> = 0.950 IN<sup>3</sup>/FT OF WIDTH  
 I = 0.557 IN<sup>4</sup>/FT OF WIDTH S<sub>x</sub> = 0.609 IN<sup>3</sup>/FT OF WIDTH

WEIGHT/FOOT = .250 LBS/FT OF BAR WEIGHT/FOOT = .186 LBS./FT OF CROSS ROD  
 APPROX. WEIGHT = 1.9 LBS/SQ. FT.

SPAN INCHES		LOAD															SAFE LOAD 2:1 SAFETY FACTOR	DEFLECTION	E x 10 <sup>6</sup> PSI
		50	100	150	200	250	300	400	500	750	1000	2000	2500	3000	4000	5000			
12	Δu	0.001	0.001	0.002	0.003	0.003	0.004	0.006	0.007	0.010	0.014	0.028	0.034	0.041	0.055	0.069	10322	0.142	2.93
	Δc	0.001	0.002	0.003	0.004	0.006	0.007	0.009	0.011	0.017	0.022	0.044	0.055	0.066	0.088	0.110			
18	Δu	0.003	0.007	0.010	0.014	0.017	0.020	0.027	0.034	0.051	0.068	0.136	0.170	0.204	0.273	0.341	4643	0.316	3.00
	Δc	0.004	0.007	0.011	0.015	0.018	0.022	0.029	0.036	0.055	0.073	0.145	0.182	0.218	0.291	0.364			
24	Δu	0.011	0.021	0.032	0.042	0.053	0.063	0.084	0.105	0.158	0.211	0.421	0.526	0.632			2643	0.556	3.07
	Δc	0.008	0.017	0.025	0.034	0.042	0.051	0.067	0.084	0.126	0.168	0.337	0.421	0.505	0.674	2643			
30	Δu	0.025	0.050	0.076	0.101	0.126	0.151	0.202	0.252	0.378	0.504						1712	0.863	3.13
	Δc	0.016	0.032	0.048	0.065	0.081	0.097	0.129	0.161	0.242	0.323	0.645							
36	Δu	0.051	0.102	0.153	0.204	0.256	0.307	0.409	0.511	0.767							1202	1.229	3.20
	Δc	0.027	0.055	0.082	0.109	0.136	0.164	0.218	0.273	0.409	0.545								
42	Δu	0.093	0.185	0.278	0.371	0.463	0.556	0.742									894	1.657	3.27
	Δc	0.042	0.085	0.127	0.169	0.212	0.254	0.339	0.424	0.636									
48	Δu	0.155	0.310	0.464	0.619												692	2.143	3.34
	Δc	0.062	0.124	0.186	0.248	0.310	0.372	0.495	0.619										

\*(M) - Multiplier for load table loads

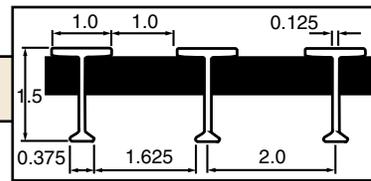


## DURAGRID® Heavy Duty Grating

The following load tables are for the solid bar heavy duty grating designed to take heavy wheel traffic such as forklifts, tow motors and truck traffic. Because of the variety of wheel types and loading, it is recommended that you contact Strongwell to determine the series of heavy duty grating needed for your application.

## DURAGRID® HD-6000 1" Bearing Bar

A = 4.8 in<sup>2</sup>/ft. of width I = 0.40 in<sup>4</sup>/ft. of width S = 0.80 in<sup>3</sup>/ft. of width

SPAN INCHES		LOAD								SAFE LOAD 2:1 SAFETY FACTOR	DEFLECTION	E x 10 <sup>6</sup> PSI
		100	200	300	500	1000	2000	3000	4000			
12	Δu	0.001	0.002	0.003	0.006	0.011	0.022	0.033	0.044	4445	0.049	5.08
	Δc	0.002	0.004	0.005	0.009	0.018	0.035	0.053	0.071			
18	Δu	0.005	0.010	0.015	0.025	0.050	0.099	0.149	0.199	4285	0.213	5.73
	Δc	0.005	0.011	0.016	0.027	0.053	0.106	0.159	3857			
24	Δu	0.015	0.031	0.046	0.077	0.154	0.309			2948	0.455	5.83
	Δc	0.012	0.025	0.037	0.062	0.123	0.247	2948	0.364			
30	Δu	0.037	0.074	0.111	0.185	0.369				1543	0.570	5.95
	Δc	0.024	0.047	0.071	0.118	0.236	1928	0.456				
36	Δu	0.076	0.152	0.228	0.380					1071	0.815	5.99
	Δc	0.041	0.081	0.122	0.203	0.406	1607	0.652				
42	Δu	0.140	0.280	0.421						787	1.104	6.02
	Δc	0.064	0.128	0.192	0.320	0.641	1377	0.883				
48	Δu	0.239	0.478							603	1.440	6.03
	Δc	0.096	0.191	0.287	0.478	1205	1.151					
54	Δu	0.380								476	1.809	6.07
	Δc	0.135	0.270	0.405	0.676	1071	1.447					

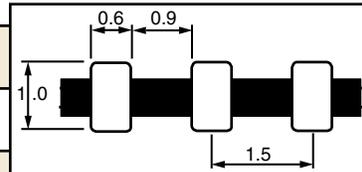

Series	Bar Width	Open Space	% Open Area	Approx. Wt.	I-in <sup>4</sup> /ft. of Width	S-in <sup>3</sup> /ft. of Width
HD 6000	.60	.90	60	4.9	0.40	0.80
HD 5000	.60	.60	50	5.9	0.50	1.00
HD 4000	.60	.40	40	7.0	0.60	1.20


### Multipliers for Series Other Than HD-6000

HD 5000 - Multiply Load Table Deflection by 0.80  
 HD 4000 - Multiply Load Table Deflection by 0.67

## DURAGRID® HD-6000 1-1/4" Bearing Bar

A = 6.0 in<sup>2</sup>/ft. of width      I = 0.781 in<sup>4</sup>/ft. of width      S = 1.24 in<sup>3</sup>/ft. of width

SPAN INCHES	LOAD												SAFE LOAD 2:1 SAFETY FACTOR	DEFLECTION	E x 10 <sup>6</sup> PSI	
	100	200	300	500	1000	2000	3000	4000	5000	6000	7000	8000				
<b>12</b>	Δu	0.001	0.001	0.002	0.003	0.006	0.013	0.019	0.025	0.032	0.038	0.044	0.051	13760	0.087	<b>4.56</b>
	Δc	0.001	0.002	0.003	0.005	0.010	0.020	0.030	0.040	0.051	0.061	0.071	0.081			
<b>18</b>	Δu	0.003	0.005	0.008	0.013	0.027	0.053	0.080	0.107	0.134	0.160	0.187	7684	0.205	<b>5.46</b>	
	Δc	0.003	0.006	0.009	0.014	0.028	0.057	0.085	0.114	0.142	0.171	0.199				7200
<b>24</b>	Δu	0.008	0.016	0.024	0.040	0.080	0.161	0.241	0.322	0.402	0.483	0.563	7032	0.566	<b>5.73</b>	
	Δc	0.006	0.013	0.019	0.032	0.064	0.129	0.193	0.257	0.322	0.386	0.450				7032
<b>30</b>	Δu	0.019	0.038	0.057	0.095	0.190	0.381	0.571	0.487	0.609	4504	0.858	<b>5.91</b>			
	Δc	0.012	0.024	0.037	0.061	0.122	0.244	0.366								
<b>36</b>	Δu	0.039	0.078	0.117	0.196	0.392	0.626	3125	1.224	<b>5.96</b>						
	Δc	0.021	0.042	0.063	0.104	0.209					0.418	4680	0.977			
<b>42</b>	Δu	0.072	0.144	0.216	0.360	0.658	2296	1.652	<b>6.01</b>							
	Δc	0.033	0.066	0.099	0.164					0.329	4018	1.321				
<b>48</b>	Δu	0.122	0.243	0.365	0.609	0.487	1758	2.140	<b>6.06</b>							
	Δc	0.049	0.097	0.146	0.243					3516	1.712					
<b>54</b>	Δu	0.195	0.390	0.585	0.347	1389	2.708	<b>6.06</b>								
	Δc	0.069	0.139	0.208					3125	2.166						
<b>60</b>	Δu	0.296	0.591	0.473	1125	3.326	<b>6.09</b>									
	Δc	0.095	0.189					0.284	2812	2.660						

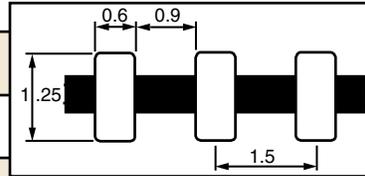

Series	Bar Width	Open Space	% Open Area	Approx. Wt.	I-in <sup>4</sup> /ft. of Width	S-in <sup>3</sup> /ft. of Width
HD 6000	.60	.90	60	5.9	.781	1.25
HD 5000	.60	.60	50	7.2	.977	1.56
HD 4000	.60	.40	40	8.5	1.172	1.88


### Multipliers for Series Other Than HD-6000

HD 5000 - Multiply Load Table Deflection by 0.80  
HD 4000 - Multiply Load Table Deflection by 0.67

## DURAGRID® HD-6000 1-1/2" Bearing Bar

A = 7.2 in<sup>2</sup>/ft. of width      I = 1.35 in<sup>4</sup>/ft. of width      S = 1.80 in<sup>3</sup>/ft. of width

SPAN INCHES	LOAD												SAFE LOAD 2:1 SAFETY FACTOR	DEFLECTION	E x 10 <sup>6</sup> PSI	
	100	200	300	500	1000	2000	3000	4000	5000	6000	7000	8000				
<b>12</b>	Δu	0.000	0.001	0.001	0.002	0.005	0.009	0.014	0.019	0.023	0.028	0.033	0.037	18880	0.088	<b>3.58</b>
	Δc	0.001	0.001	0.002	0.004	0.007	0.015	0.022	0.030	0.037	0.045	0.052	0.060			
<b>18</b>	Δu	0.002	0.004	0.005	0.009	0.018	0.035	0.053	0.070	0.088	0.106	0.123	0.141	9728	0.171	<b>4.79</b>
	Δc	0.002	0.004	0.006	0.009	0.019	0.038	0.056	0.075	0.094	0.113	0.132	0.150			
<b>24</b>	Δu	0.005	0.010	0.015	0.026	0.051	0.103	0.154	0.205	0.256	0.308	0.359	0.410	9500	0.487	<b>5.20</b>
	Δc	0.004	0.008	0.012	0.021	0.041	0.082	0.123	0.164	0.205	0.246	0.287	0.328			
<b>30</b>	Δu	0.012	0.024	0.036	0.060	0.120	0.240	0.360	0.480	0.599	0.719	6570	0.788	<b>5.43</b>		
	Δc	0.008	0.015	0.023	0.038	0.077	0.153	0.230	0.307	0.384	0.460				0.537	0.614
<b>36</b>	Δu	0.025	0.049	0.074	0.123	0.246	0.492	0.783	0.525	0.656	4562	1.122	<b>5.49</b>			
	Δc	0.013	0.026	0.039	0.066	0.131	0.262	0.393						6843	0.897	
<b>42</b>	Δu	0.045	0.090	0.135	0.225	0.449	0.616	3352	1.505	<b>5.57</b>						
	Δc	0.021	0.041	0.062	0.103	0.205					0.411	5865	1.204			
<b>48</b>	Δu	0.076	0.152	0.228	0.380	0.608	2566	1.952	<b>5.61</b>							
	Δc	0.030	0.061	0.091	0.152					0.304	5132	1.561				
<b>54</b>	Δu	0.121	0.242	0.364	0.606	0.431	2027	2.456	<b>5.64</b>							
	Δc	0.043	0.086	0.129	0.215					4562	1.966					
<b>60</b>	Δu	0.185	0.369	0.554	0.591	1642	2.033	<b>5.64</b>								
	Δc	0.059	0.118	0.177					0.296	4106	2.427					
<b>66</b>	Δu	0.269	0.537	0.391	1354	3.636	<b>5.68</b>									
	Δc	0.078	0.156					0.234	3732	2.915						
<b>72</b>	Δu	0.380	0.761	0.507	1140	4.335	<b>5.68</b>									
	Δc	0.101	0.203					0.304	3422	3.470						

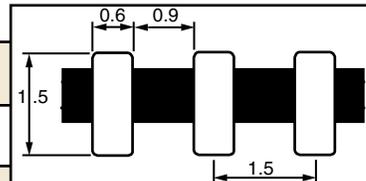

Series	Bar Width	Open Space	% Open Area	Approx. Wt.	I-in <sup>4</sup> /ft. of Width	S-in <sup>3</sup> /ft. of Width
HD 6000	.60	.90	60	7.0	1.35	1.80
HD 5000	.60	.60	50	8.5	1.69	2.25
HD 4000	.60	.40	40	10.1	2.02	2.70


### Multipliers for Series Other Than HD-6000

HD 5000 - Multiply Load Table Deflection by 0.80  
HD 4000 - Multiply Load Table Deflection by 0.67

## DURAGRID® HD-6000 1-3/4" Bearing Bar

A = 8.4 in<sup>2</sup>/ft. of width      I = 2.14 in<sup>4</sup>/ft. of width      S = 2.45 in<sup>3</sup>/ft. of width

SPAN INCHES		LOAD											SAFE LOAD 2:1 SAFETY FACTOR	DEFLECTION	E x 10 <sup>6</sup> PSI	
		100	200	300	500	1000	2000	3000	4000	5000	6000	7000				8000
12	Δu	0.000	0.001	0.001	0.002	0.004	0.007	0.011	0.014	0.018	0.021	0.025	0.029	19920	0.071	2.95
	Δc	0.000	0.001	0.002	0.003	0.006	0.011	0.017	0.023	0.029	0.034	0.040	0.046			
18	Δu	0.001	0.002	0.004	0.006	0.012	0.023	0.035	0.047	0.059	0.070	0.082	0.094	15926	0.187	4.53
	Δc	0.001	0.003	0.004	0.006	0.013	0.025	0.038	0.050	0.063	0.075	0.088	0.100			
24	Δu	0.003	0.007	0.010	0.016	0.033	0.065	0.098	0.131	0.164	0.196	0.229	0.262	12400	0.406	5.14
	Δc	0.003	0.005	0.008	0.013	0.026	0.052	0.079	0.105	0.131	0.157	0.183	0.209			
30	Δu	0.007	0.015	0.022	0.037	0.075	0.149	0.224	0.298	0.373	0.447	0.522	0.596	9062	0.675	5.51
	Δc	0.005	0.010	0.014	0.024	0.048	0.095	0.143	0.191	0.239	0.286	0.334	0.382			
36	Δu	0.015	0.030	0.045	0.076	0.151	0.303	0.454	0.605	0.756	0.908			6294	0.952	5.63
	Δc	0.008	0.016	0.024	0.040	0.081	0.161	0.242	0.323	0.403	0.484	0.565	0.645			
42	Δu	0.027	0.055	0.082	0.137	0.275	0.550							4623	1.271	5.74
	Δc	0.013	0.025	0.038	0.063	0.126	0.251	0.377	0.503	0.628						
48	Δu	0.046	0.093	0.139	0.232	0.464								3540	1.643	5.80
	Δc	0.019	0.037	0.056	0.093	0.186	0.371	0.557								
54	Δu	0.074	0.148	0.221	0.369	0.738								2796	2.064	5.84
	Δc	0.026	0.052	0.079	0.131	0.262	0.525									
60	Δu	0.113	0.225	0.338	0.563									2265	2.549	5.84
	Δc	0.036	0.072	0.108	0.180	0.360										
66	Δu	0.164	0.327	0.491										1872	3.063	5.88
	Δc	0.048	0.095	0.143	0.238	0.476										
72	Δu	0.231	0.463	0.694										1573	3.639	5.89
	Δc	0.062	0.123	0.185	0.308	0.617										
78	Δu	0.313	0.626											1340	4.192	6.00
	Δc	0.077	0.154	0.231	0.385											

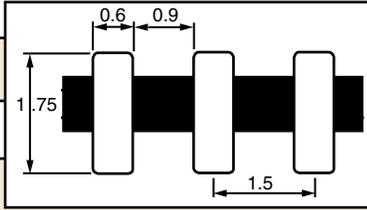


Series	Bar Width	Open Space	% Open Area	Approx. Wt.	I-in <sup>4</sup> /ft. of Width	S-in <sup>3</sup> /ft. of Width
HD 6000	.60	.90	60	8.0	2.14	2.45
HD 5000	.60	.60	50	9.8	2.68	3.06
HD 4000	.60	.40	40	11.6	3.22	3.68

**Multipliers for Series Other Than HD-6000**  
 HD 5000 - Multiply Load Table Deflection by 0.80  
 HD 4000 - Multiply Load Table Deflection by 0.67

## DURAGRID® HD-6000 2" Bearing Bar

A = 9.6 in<sup>2</sup>/ft. of width      I = 3.2 in<sup>4</sup>/ft. of width      S = 3.2 in<sup>3</sup>/ft. of width

SPAN INCHES		LOAD											SAFE LOAD 2:1 SAFETY FACTOR	DEFLECTION	E x 10 <sup>6</sup> PSI	
		100	200	300	500	1000	2000	3000	4000	5000	6000	7000				8000
12	Δu	0.000	0.001	0.001	0.002	0.003	0.006	0.009	0.012	0.015	0.018	0.021	0.024	15360	0.047	2.32
	Δc	0.000	0.001	0.001	0.002	0.005	0.010	0.015	0.019	0.024	0.029	0.034	0.039			
18	Δu	0.001	0.002	0.003	0.005	0.009	0.018	0.028	0.037	0.046	0.055	0.064	0.074	13500	0.124	3.87
	Δc	0.001	0.002	0.003	0.005	0.010	0.020	0.029	0.039	0.049	0.059	0.069	0.078			
24	Δu	0.002	0.005	0.007	0.012	0.024	0.049	0.073	0.098	0.122	0.146	0.171	0.195	13000	0.317	4.61
	Δc	0.002	0.004	0.006	0.010	0.020	0.039	0.059	0.078	0.098	0.117	0.137	0.156			
30	Δu	0.005	0.011	0.016	0.027	0.054	0.108	0.162	0.215	0.269	0.323	0.377	0.431	9946	0.536	5.10
	Δc	0.003	0.007	0.010	0.017	0.034	0.069	0.103	0.138	0.172	0.207	0.241	0.276			
36	Δu	0.011	0.022	0.032	0.054	0.108	0.216	0.324	0.431	0.539	0.647			6880	0.742	5.28
	Δc	0.006	0.012	0.017	0.029	0.058	0.115	0.173	0.230	0.288	0.345	0.403	0.460			
42	Δu	0.019	0.039	0.058	0.097	0.194	0.387	0.581	0.774					5112	0.990	5.45
	Δc	0.009	0.018	0.027	0.044	0.089	0.177	0.266	0.354	0.443	0.531	0.620	0.708			
48	Δu	0.033	0.066	0.099	0.164	0.328	0.657							3860	1.268	5.48
	Δc	0.013	0.026	0.039	0.066	0.131	0.263	0.394	0.526	0.657						
54	Δu	0.052	0.104	0.156	0.259	0.519								3070	1.592	5.56
	Δc	0.018	0.037	0.055	0.092	0.184	0.369	0.553								
60	Δu	0.079	0.158	0.236	0.394									2485	1.957	5.58
	Δc	0.025	0.050	0.076	0.126	0.252	0.504									
66	Δu	0.114	0.228	0.342	0.570									2054	2.343	5.64
	Δc	0.033	0.066	0.100	0.166	0.332	0.664									
72	Δu	0.161	0.323	0.484	0.806									1726	2.784	5.65
	Δc	0.043	0.086	0.129	0.215	0.430										
78	Δu	0.221	0.443	0.664										1471	3.256	5.67
	Δc	0.054	0.109	0.163	0.272	0.545										
84	Δu	0.296	0.592											1269	3.758	5.70
	Δc	0.068	0.135	0.203	0.338	0.677										

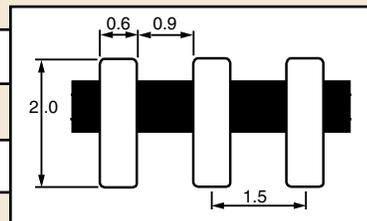

Series	Bar Width	Open Space	% Open Area	Approx. Wt.	I-in <sup>4</sup> /ft. of Width	S-in <sup>3</sup> /ft. of Width
HD 6000	.60	.90	60	9.0	3.20	3.20
HD 5000	.60	.60	50	11.1	4.00	4.00
HD 4000	.60	.40	40	14.4	4.80	4.80


**Multipliers for Series Other Than HD-6000**  
 HD 5000 - Multiply Load Table Deflection by 0.80  
 HD 4000 - Multiply Load Table Deflection by 0.67

## DURAGRID® HD-6000 2-1/4" Bearing Bar

A = 10.8 in<sup>2</sup>/ft. of width      I = 4.56 in<sup>4</sup>/ft. of width      S = 4.05 in<sup>3</sup>/ft. of width

SAFE  
LOAD  
2:1  
SAFETY  
FACTOR      DEFLECTION      E x 10<sup>6</sup>  
PSI

SPAN INCHES	LOAD													SAFETY FACTOR	DEFLECTION	E x 10 <sup>6</sup> PSI	
	100	200	300	500	1000	2000	3000	4000	5000	6000	7000	8000					
12	Δu	0.000	0.000	0.001	0.001	0.002	0.002	0.005	0.007	0.010	0.012	0.015	0.017	0.019	20960	0.051	2.03
	Δc	0.000	0.001	0.001	0.002	0.004	0.004	0.008	0.012	0.016	0.019	0.023	0.027	0.031			
18	Δu	0.001	0.001	0.002	0.004	0.007	0.014	0.021	0.028	0.035	0.042	0.050	0.057	16640	0.118	3.53	
	Δc	0.001	0.002	0.002	0.004	0.008	0.015	0.023	0.030	0.038	0.045	0.053	0.060				16640
24	Δu	0.002	0.003	0.005	0.009	0.017	0.035	0.052	0.070	0.087	0.105	0.122	0.139	16000	0.279	4.53	
	Δc	0.001	0.003	0.004	0.007	0.014	0.028	0.042	0.056	0.070	0.084	0.098	0.112				16000
30	Δu	0.004	0.008	0.011	0.019	0.038	0.076	0.114	0.152	0.190	0.228	0.266	0.304	12800	0.486	5.08	
	Δc	0.002	0.005	0.007	0.012	0.024	0.049	0.073	0.097	0.121	0.146	0.170	0.194				16000
36	Δu	0.007	0.015	0.022	0.037	0.075	0.149	0.224	0.299	0.374	0.448	0.523	0.598	10720	0.801	5.35	
	Δc	0.004	0.008	0.012	0.020	0.040	0.080	0.120	0.159	0.199	0.239	0.279	0.319				16000
42	Δu	0.013	0.027	0.040	0.067	0.134	0.268	0.402	0.536	0.669	7876	1.055	5.53				
	Δc	0.006	0.012	0.018	0.031	0.061	0.122	0.184	0.245	0.306				0.367	0.428	0.490	13783
48	Δu	0.022	0.045	0.067	0.112	0.224	0.447	0.671	6030	1.348	5.65						
	Δc	0.009	0.018	0.027	0.045	0.089	0.179	0.268				0.358	0.447	0.537	0.626	12060	1.078
54	Δu	0.035	0.070	0.106	0.176	0.352	4764	1.679	5.74								
	Δc	0.013	0.025	0.038	0.063	0.125				0.251	0.376	0.501	0.627	10720	1.344		
60	Δu	0.053	0.107	0.160	0.267	0.534	3859	2.063	5.77								
	Δc	0.017	0.034	0.051	0.086	0.171				0.342	0.513	0.684	9648	1.650			
66	Δu	0.078	0.155	0.233	0.388	3789	2.939	5.82									
	Δc	0.023	0.045	0.068	0.113				0.226	0.451	0.677	8771	1.979				
72	Δu	0.109	0.219	0.328	0.547	2680	2.935	5.84									
	Δc	0.029	0.058	0.088	0.146				0.292	0.584	8040	2.348					
78	Δu	0.151	0.301	0.452	2283	3.437	5.85										
	Δc	0.037	0.074	0.111				0.185	0.371	7421	2.750						
84	Δu	0.201	0.403	0.604	1954	3.937	5.88										
	Δc	0.046	0.092	0.138				0.230	0.461	6841	3.150						
90	Δu	0.265	0.529	1715	4.538	5.90											
	Δc	0.056	0.113				0.169	0.282	0.565	6432	3.631						
96	Δu	0.341	0.683	1507	5.145	5.92											
	Δc	0.068	0.137				0.205	0.341	0.683	6030	4.117						

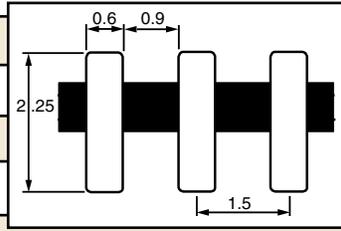

Series	Bar Width	Open Space	% Open Area	Approx. Wt.	I-in <sup>4</sup> /ft. of Width	S-in <sup>3</sup> /ft. of Width
HD 6000	.60	.90	60	10.1	4.56	4.05
HD 5000	.60	.60	50	12.4	5.70	5.06
HD 4000	.60	.40	40	14.7	6.83	6.07


**Multipliers for Series Other Than HD-6000**  
 HD 5000 - Multiply Load Table Deflection by 0.80  
 HD 4000 - Multiply Load Table Deflection by 0.67

## DURAGRID® HD-6000 2-1/2" Bearing Bar

A = 12.0 in<sup>2</sup>/ft. of width      I = 6.25 in<sup>4</sup>/ft. of width      S = 5.00 in<sup>3</sup>/ft. of width

SAFE  
LOAD  
2:1  
SAFETY  
FACTOR      DEFLECTION      E x 10<sup>6</sup>  
PSI

SPAN INCHES	LOAD													SAFETY FACTOR	DEFLECTION	E x 10 <sup>6</sup> PSI
	100	200	300	500	1000	2000	3000	4000	5000	6000	7000	8000				
12	Δu	0.000	0.000	0.001	0.001	0.002	0.004	0.007	0.009	0.011	0.013	0.016	0.018	22400	0.050	1.61
	Δc	0.000	0.001	0.001	0.002	0.004	0.007	0.011	0.014	0.018	0.021	0.025	0.029			
18	Δu	0.001	0.001	0.002	0.003	0.006	0.012	0.018	0.023	0.029	0.035	0.041	0.047	17640	0.103	3.11
	Δc	0.001	0.001	0.002	0.003	0.006	0.013	0.019	0.025	0.031	0.038	0.044	0.050			
24	Δu	0.001	0.003	0.004	0.007	0.014	0.029	0.043	0.057	0.071	0.086	0.100	0.114	13716	0.196	4.03
	Δc	0.001	0.002	0.003	0.006	0.011	0.023	0.034	0.046	0.057	0.069	0.080	0.091			
30	Δu	0.003	0.006	0.009	0.015	0.030	0.060	0.091	0.121	0.151	0.181	0.211	0.241	11800	0.356	4.66
	Δc	0.002	0.004	0.006	0.010	0.019	0.039	0.058	0.077	0.097	0.116	0.135	0.155			
36	Δu	0.006	0.012	0.017	0.029	0.058	0.117	0.175	0.233	0.292	0.350	0.408	0.467	9493	0.554	5.00
	Δc	0.003	0.006	0.009	0.016	0.031	0.062	0.093	0.124	0.156	0.187	0.218	0.249			
42	Δu	0.010	0.021	0.031	0.051	0.103	0.206	0.309	0.412	0.515	0.617	0.719	0.821	6975	0.718	5.25
	Δc	0.005	0.009	0.014	0.024	0.047	0.094	0.141	0.188	0.235	0.282	0.329	0.376			
48	Δu	0.017	0.034	0.052	0.086	0.172	0.344	0.516	0.688	5340	0.918	5.36				
	Δc	0.007	0.014	0.021	0.034	0.069	0.138	0.206	0.275				0.344	0.413	0.481	0.550
54	Δu	0.027	0.054	0.081	0.135	0.270	0.541	4419	1.195	5.46						
	Δc	0.010	0.019	0.029	0.048	0.096	0.192				0.288	0.385	0.481	0.577	0.673	9943
60	Δu	0.041	0.082	0.123	0.204	0.408	3417	1.395	5.51							
	Δc	0.013	0.026	0.039	0.065	0.131				0.261	0.392	0.523	0.653	8544	1.116	
66	Δu	0.059	0.119	0.178	0.297	0.594	2824	1.676	5.55							
	Δc	0.017	0.035	0.052	0.086	0.173				0.345	0.518	0.691	7767	1.341		
72	Δu	0.084	0.168	0.252	0.420	2374	1.992	5.56								
	Δc	0.022	0.045	0.067	0.112				0.224	0.448	0.671	7120	1.593			
78	Δu	0.115	0.230	0.345	0.575	2022	2.324	5.59								
	Δc	0.028	0.057	0.085	0.141				0.283	0.566	0.849	6572	1.860			
84	Δu	0.154	0.308	0.461	1744	2.682	5.62									
	Δc	0.035	0.070	0.105				0.176	0.352	0.703	6103	2.145				
90	Δu	0.202	0.404	0.606	1519	3.068	5.64									
	Δc	0.043	0.086	0.129				0.215	0.431	5696	2.454					
96	Δu	0.260	0.520	1335	3.472	5.67										
	Δc	0.052	0.104				0.156	0.260	0.520	5340	2.777					
102	Δu	0.330	0.659	1182	3.897	5.70										
	Δc	0.062	0.124				0.186	0.310	0.621	5026	3.119					

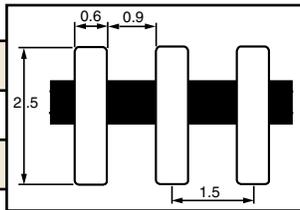

Series	Bar Width	Open Space	% Open Area	Approx. Wt.	I-in <sup>4</sup> /ft. of Width	S-in <sup>3</sup> /ft. of Width
HD 6000	.60	.90	60	11.1	6.25	5.00
HD 5000	.60	.60	50	13.7	7.81	6.25
HD 4000	.60	.40	40	16.3	9.38	7.50

**Multipliers for Series Other Than HD-6000**  
 HD 5000 - Multiply Load Table Deflection by 0.80  
 HD 4000 - Multiply Load Table Deflection by 0.67

# Specifications

## How to Specify DURADEK® and DURAGRID®

Fiberglass grating shall be (select one):

DURADEK® Series (I-6000 1") (I-6000 1-1/2") (T-5000 2") as manufactured by Strongwell-Chatfield Division, Chatfield, Minnesota.

DURAGRID® as manufactured by Strongwell-Chatfield Division, Chatfield, Minnesota. Grating panels shall be made of (1") (1-1/4") (1-1/2") (2") deep pultruded (T) (I) bars.


DURAGRID® Heavy Duty as manufactured by Strongwell-Chatfield Division, Chatfield, Minnesota. Grating panels shall be made of (1") (1-1/4") (1-1/2") (1-3/4") (2") (2-1/4") (2-1/2") deep pultruded (HD) bars.

The bearing bars shall be spaced at \_\_\_\_\_ inches on center. Resin shall be fire retardant (polyester) (vinyl ester) meeting the requirements of a Class 1 rating of 25 or less per ASTM E-84 and meets the self-extinguishing requirements of ASTM D-635. Color shall be (gray) (yellow). Resin shall be UV inhibited and the composite shall include a veil on all exposed surfaces. Panels shall be assembled into the sizes ordered using a 3-piece pultruded cross-rod system.

The cross-rods shall consist of a center core wedge and 2 spacer bars that are notched at each bearing bar so that each bearing bar is both mechanically locked and chemically bonded to the web of each bearing bar. The spacer bars shall be continually bonded to the center core wedge. The cross-rods shall be spaced a maximum of (6") (12") in the panel. The top of the panels (shall) (shall not) be covered with a bonded grit anti-skid surface.

NOTE: If special options are required that are not stated in the above specification, fill in your special requirement in the appropriate section.

## How to Order

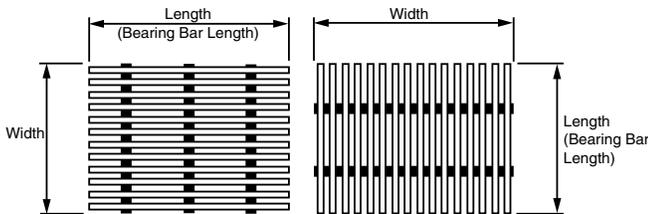

Panel Sizes Are Specified: Width x Length

When ordering DURADEK® or DURAGRID®, make sure the bearing bars in the panel are oriented in the correct direction for the application. Bearing bars should traverse from support to support. Cross-rods are not intended to be applied in the span direction. The adjacent drawing will help you specify the width and length of panels. NOTE: Width is the measurement from end to end of the cross-rods. Length is always the bearing bar length.

# Options

Strongwell offers a broad range of fiberglass decking and flooring materials. A brief description of the other available flooring products in the Strongwell industrial product line is shown here. Full-color brochures are available for each individual product.



**SAFPLANK®**, a system of interlocking planks, provides easy installation and superior corrosion resistance for applications requiring a solid deck or floor.




**SAFDECK®** is a high strength, one-piece, overlapping panel system. Low in conductivity and nonsparking, **SAFDECK®** provides safe walkways in numerous applications.



**DURAGRATE®** molded grating has a concave profile on the upper surface for skid resistance. Grit tops are optional.



**COMPOSOLITE®** building panels are suitable for major load bearing structural applications and are particularly well-suited to outdoor use and corrosive environments.

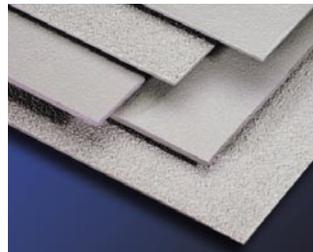

**SAFPLATE®**, a solid anti-skid flooring, helps reduce worker slips and falls in both wet and dry applications.



**STRONGWELL**

ISO-9001:2000 Certified Manufacturing Plants

### BRISTOL DIVISION

400 Commonwealth Ave., P.O. Box 580, Bristol, VA 24201-3820 USA  
(276)645-8000 FAX (276)645-8132

### CHATFIELD DIVISION\*

1610 Highway 52 South, Chatfield, MN 55923-9799 USA  
(507)867-3479 FAX (507)867-4031

\*DURADEK®/DURAGRID® manufacturing location

www.strongwell.com